

1/64 Drift RC Car

DKM64 V3

(with Front Suspension)

Build Guide

A. Chassis dimensions:

- Wheel-base: 37.3 to 42.7 mm
- Front wheel width: 31.8 mm
- Rear wheel width: 30.4 mm


B. 3D Print files: 12 files to complete 1 car kit

Optional files for Rear Magnet Mount [car's body mounting height]:

- 6.5mm [optional]
- 7.3mm [default]
- 8.0mm [optional]

C. Adjustable wheel-base length:

- Flip over the rear chassis to get 5mm difference in length
- Add 1mm washers between Main chassis and Rear chassis to increase length

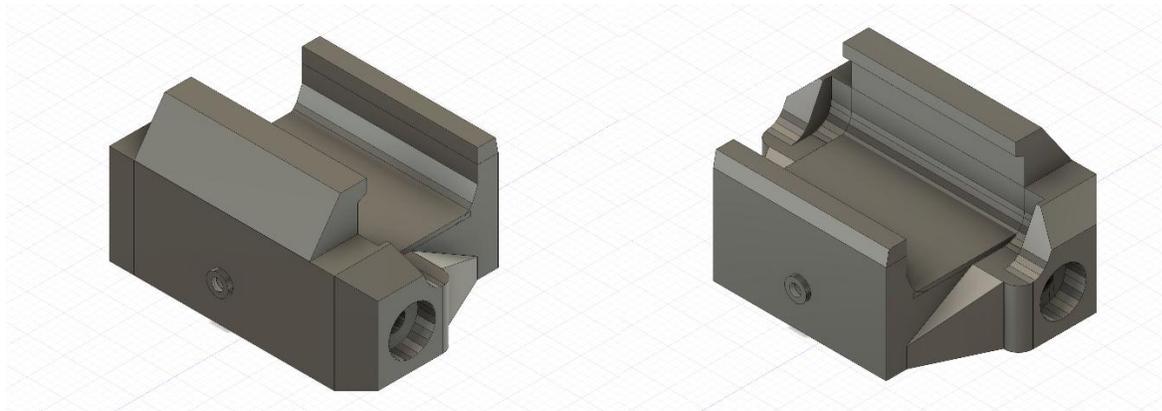


D. Required Parts:

- 2x Front Suspension Springs:
 - Wire diameter 0.2mm
 - Outer Diameter: 2mm
 - Length: 5mm
- Front suspension arms screws:
 - Top arms: 2pcs M1 x 8mm
 - Bottom arms: 2pcs M1 x 7mm
- 1x Motor: FF-K20-9Z100 Mini K20 Motor DC 1.5V 3V 3.7V 30000RPM High Speed Micro 8mm*6mm*14.5mm. from AliExpress.com
- 1x ESC: DM-Racing NEZ ESC from GT55 website
- 1x Servo: DM-Racing Linear Servo from GT55 website
- 1x Nano Receiver with Gyro: up to your controller protocol, as long it is not bigger than 19mm x 12mm, and has a drift capable Gyro.
- Rear drive axle: M1 (OD: 1mm) rod cut to 28mm length
- Spur Gear: 0.2Modules, 1mm hole, 2mm thickness, 40T
- Pinion Gear: 0.2Modulus, 1mm hole, 2mm thickness, 20T
- **6x Bearings** (ID: 1mm x OD:3mm x Thickness: 1mm) 681ZZ Miniature Mini Ball Bearings Metal Open Micro Bearing 1x3x1mm. AliExpress.com
 - 1x for right front knuckle
 - 1x for left front knuckle
 - 2x for mounting rear chassis
 - 2x for rear axel
- M1 Screws, washers & Nuts:
 - Servo lock screws: 2pcs M1 x 2.5mm screw
 - Top deck mounting: 4pcs M1 x 3mm screw
 - Rear chassis mounting to bearings: 1pc M1 x 6mm screw + 1pc M1 washer (add more if required to increase length to fit body)
 - Front Arm (Top) mounting to chassis: 2pcs M1 x 4mm screw
 - Front Wheel (per wheel): 1pcs M1 x 5mm screw + 1pc M1 washer between wheel and bearing + 1pcs M1 nuts.
- Magnets for body mounts:
 - **1x Front:** OD:3mm x Thickness:2mm, N35 Round Magnet 3x2 mm Neodymium Magnet Permanent. From AliExpress
 - **2x Back:** OD:3mm x Thickness:2mm, N35 Round Magnet 3x2 mm Neodymium Magnet Permanent. From AliExpress
 - **Spacer Magnets** (to increase height to fit taller car bodies and also to be mounted on car body): OD:3mm x Thickness:1mm, N35 Round Magnet 3x1 mm Neodymium Magnet Permanent. From AliExpress

E. 3D Printer and recommended settings:

- Printer: Bamboo A1 mini
- Filament: PETG
- Nozzle: 0.2mm
- Layer height: 10mm or lower
- Infill: 50%
- Support: Normal / Snug / 45deg / support line width: 18
- Support Base Pattern: Hollow
- Support Interface Pattern: Rectilinear
- Others: "Inner Brim only" for printing **tires only**.
- Print Sequence: by Object (not Layer)
- **Important!** Please note the Individual parts orientation on print bed. And print each part individually by "Object". Don't print all parts at the same time.

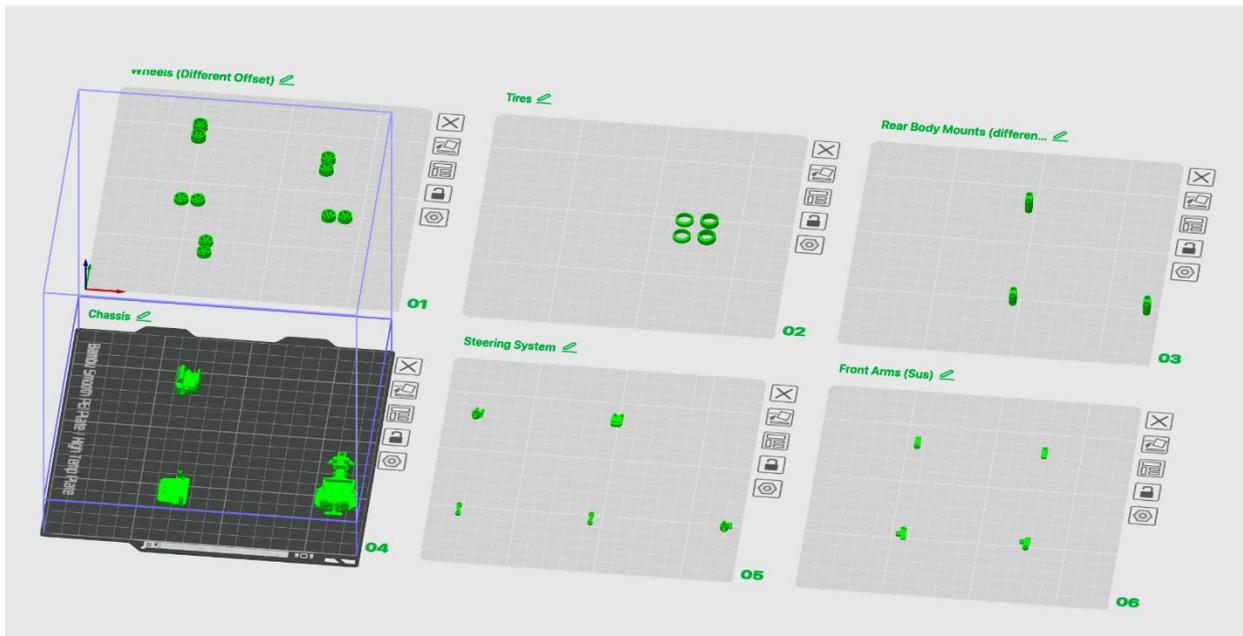

F. Assembly Tips:

- Ensure ball-joint's ball are as round and smooth as possible, use a small fine file to gently remove excess filaments.
- Use CA glue to glue the Spur gear and rear wheels to the rear drive axle. Be careful not to get CA glue on the bearings.
- Use another spur gear (same size and type) on the opposite side of the rear drive wheel as a spacer to achieve equal weight distribution and spacing with the main drive wheel. Also allows for easy flipping of the rear chassis to fit different body lengths.
- **Important!** Please use Silicon Oil on all ball joints. I'm using 300 Silicon shock oil.
- Printed parts with screw holes: Open-up the screw holes and Pre-screw all screw holes before assembly. I use a sharp tweezer to poke into the screw holes to open-up the screw holes, then screw in a 1mm screw, to ensure the screw hole thread is straight before assembling it to the chassis, as printed part's screw holes are usually smaller than the required M1 screws size.
- Ensure all parts are moving smoothly and easily, especially the steering linkages and knuckles as the linear servo's torque is not strong enough. If the servo starts jamming, means there's binding &/or rubbing in the linkage and knuckles, or your transmitter &/or gyro end-points are over extended beyond the length of the steering arm length, so the servo horn is tilted at the ends.
- The 3D printed servo horn has 2 balls at the back which helps prevent the horn tilting at the end of the servo travel. Due to manufacturing variables of the linear servo, if the space between the servo horn back and servo body is too small thus the balls are causing binding of linear servo sliding as it's too tight, then use a small file to file down the balls.

G. Images for assembly reference:

